
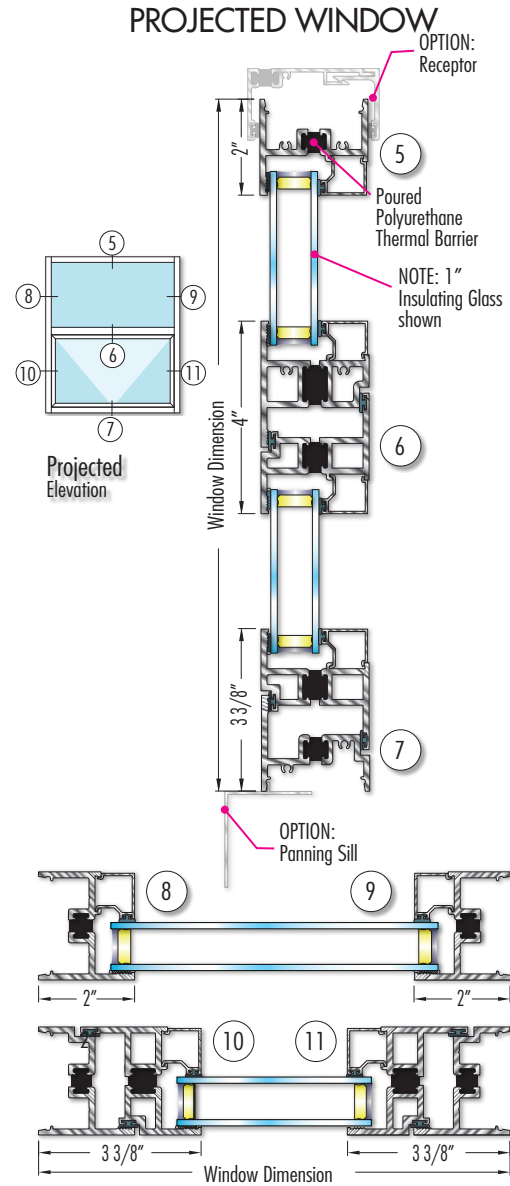


**STANDARD PRODUCT DETAILS SHOWN**  
Accessory pieces shown for illustration purposes only.

**Details Are Not Shown to Scale**

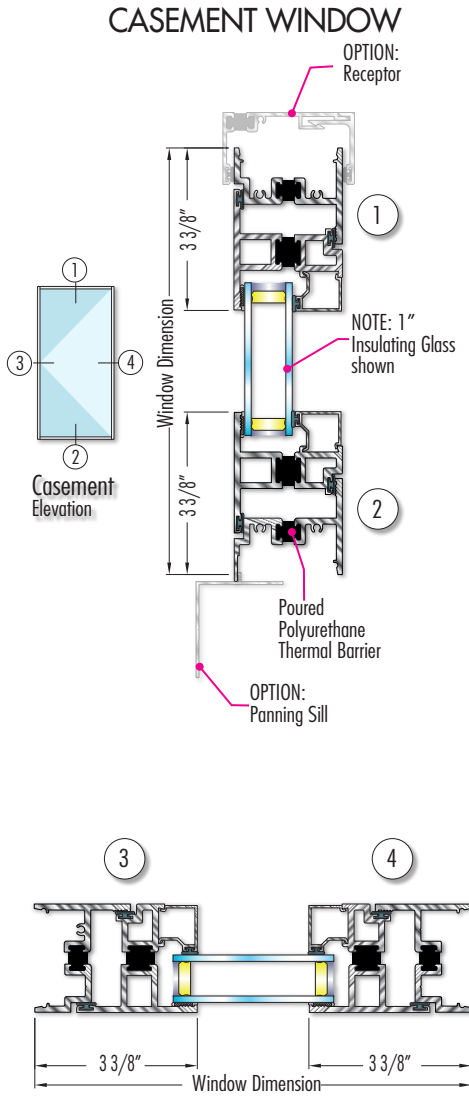

**SERIES 6500 2 1/4" FRAME DEPTH PERFORMANCE CHARACTERISTICS**

TYPE	AAMA RATING & TEST SIZE		AIR (cfm/ft <sup>2</sup> ) at 50 mph	WATER (psf)	DESIGN PRESSURE (psf)	UNIFORM LOAD STRUCTURAL (psf)	U-VALUE (Btu/hr/ft <sup>2</sup> /°F)		CRF	STC
							Low-E Glass	Non- coated Glass		
CASEMENT	C-HC80 42 x 66	AW-PG80 42 x 66 - C	0.05	12	80	120	0.48	0.63	54	37-43
PROJECTED	AP-HC85 72 x 48	AP-AW85 72 x 48	0.01	12	90 / 60	127.5 / 90	0.44	0.59	54	37-43

See website for other available configurations

1/2012