


1100 SERIES DATA SHEET

TYPE	AAMA RATING & TEST SIZE	AIR (cfm/ft ²) at 25 mph	WATER (psf)	DESIGN PRESSURE (psf)	STRUCTURAL OVERLOAD (psf)	U-VALUE (BTU/hr/ft ² /°F) ¹	CRF	STC	OITC
FIXED	CW-PG65 59 x 59	0.01	12.11	65.16	97.74	0.32 – 0.56	57	41 - 48	30 - 41

¹U-values will vary depending upon glazing selected

STANDARD PRODUCT DETAILS SHOWN

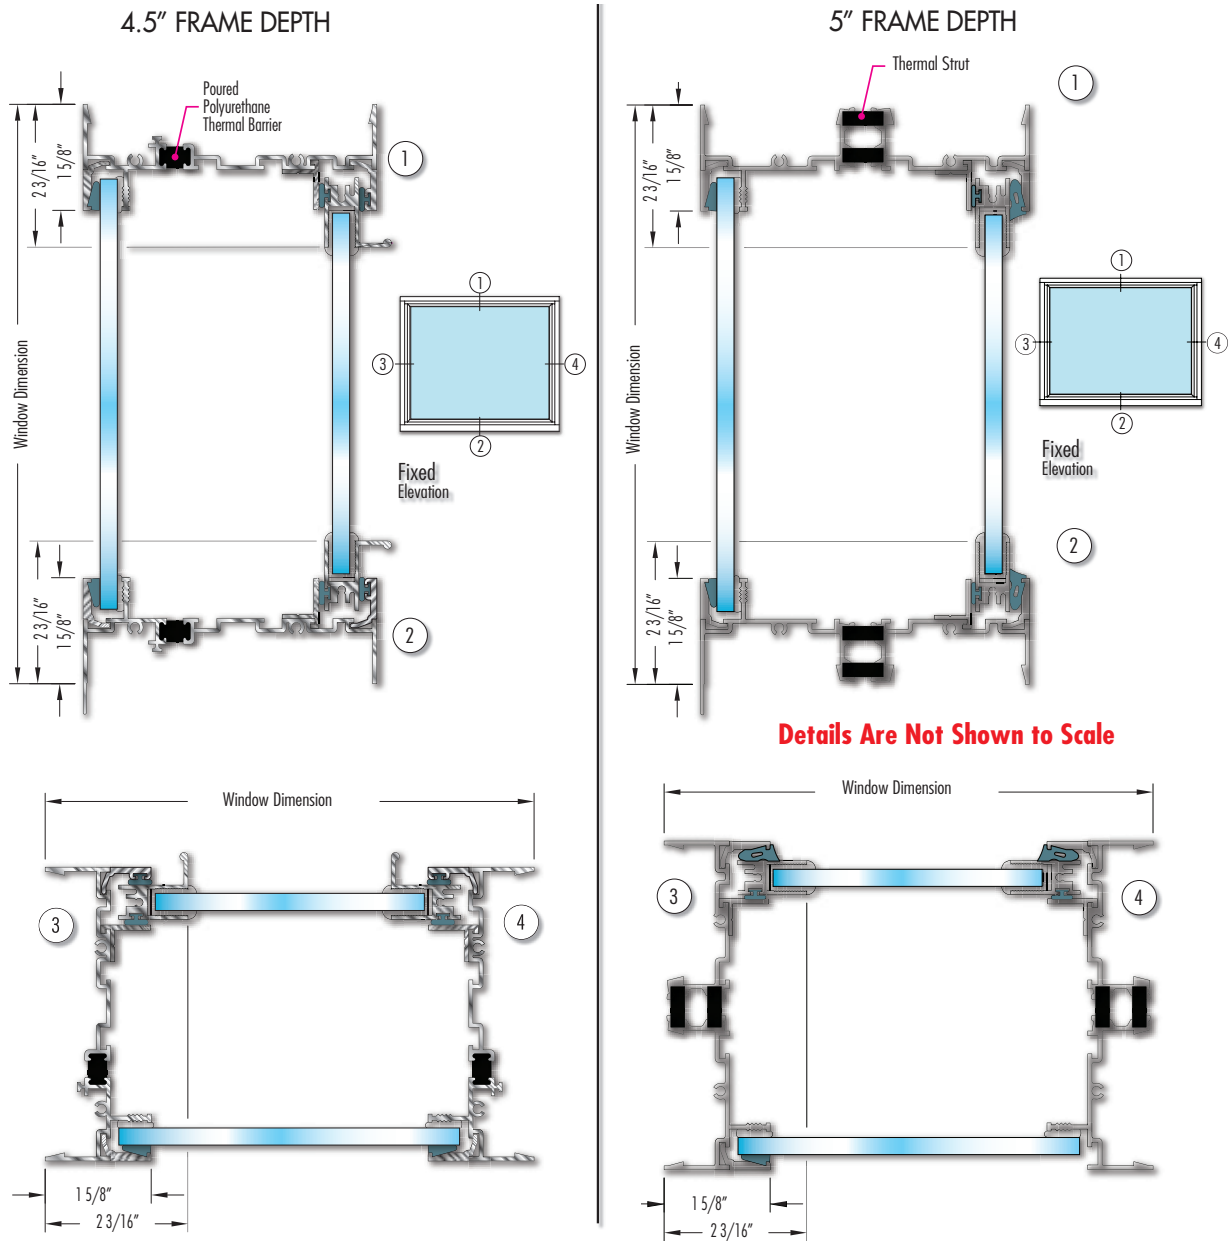

See website for other available configurations

Our products are tested to the standards of and certified by the American Architectural Manufacturer's Association and the National Fenestration Rating Council.

