

6500 SERIES DATA SHEET


TYPE	AAMA RATING & TEST SIZE	AIR (cfm/ft ² at 50 mph)	WATER (psf)	DESIGN PRESSURE (psf)	STRUCTURAL OVERLOAD (psf)	U-VALUE (BTU/hr/ft ² /°F) ¹	CRF	STC	OITC
CASEMENT	C-HC80 42 x 66	0.04	12	80.20	120.30	0.48 – 0.63	54	37 - 43	29 - 34
	AW-PG80 42 x 66	0.03							
PROJECTED	AP-HC90 66 x 42	0.01	12	90.23	135.34	0.40 – 0.59	54	37 - 43	29 - 34
	AW-PG90 66 x 42								

¹U-values will vary depending upon glazing selected

STANDARD PRODUCT DETAILS SHOWN


Details Are Not Shown to Scale

CASEMENT WINDOW

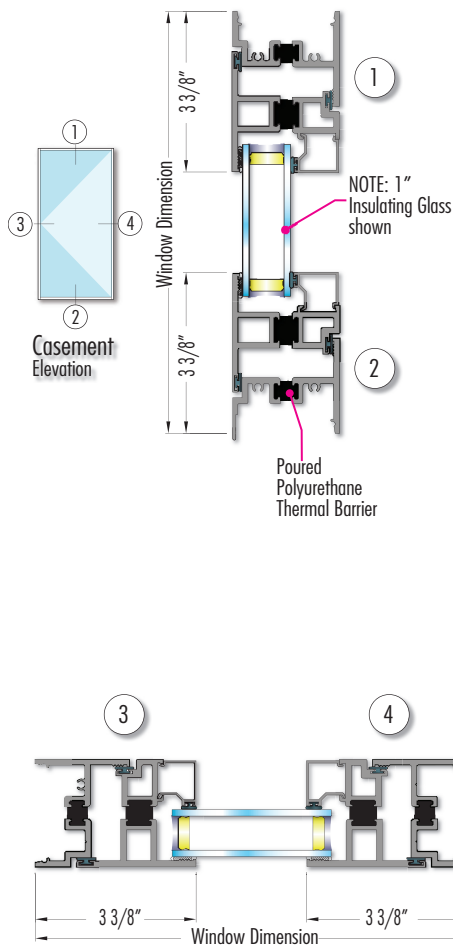

See website for other available configurations

PROJECTED WINDOW

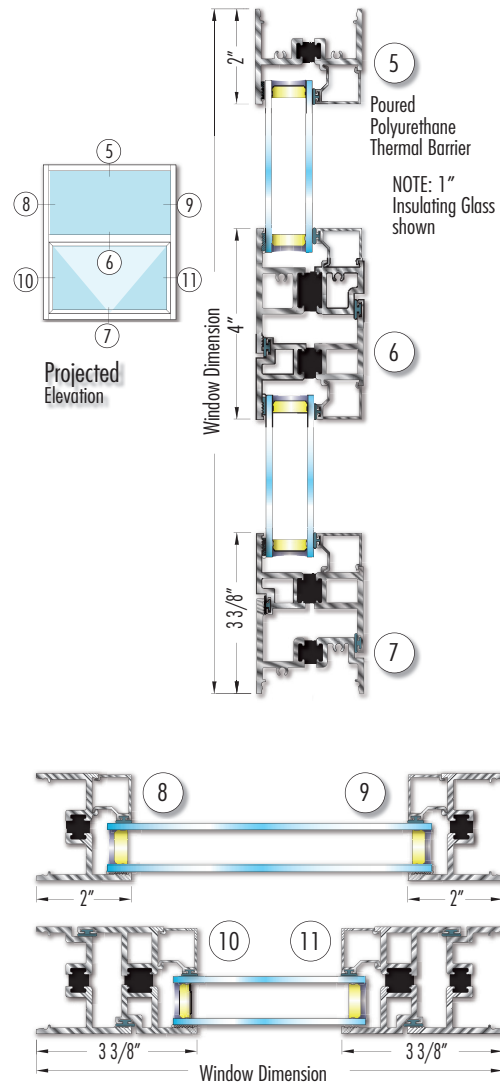

Our products are tested to the standards of and certified by the American Architectural Manufacturer's Association and the National Fenestration Rating Council.

