

GT0200 SERIES DATA SHEET

| TYPE | AAMA RATING & TEST SIZE | AIR (cfm/ft ²) at 50 mph | WATER (psf) | DESIGN PRESSURE (psf) | STRUCTURAL OVERLOAD (psf) | U-VALUE (BTU/hr/ft ² /°F) ¹ | CRF |
|--------------------|-------------------------|--------------------------------------|-------------|-----------------------|---------------------------|---|-----|
| HORIZONTAL SLIDING | AW-PG60 150 x 79 | 0.12 | 12.11 | 60.15 | 90.23 | 0.32 – 0.45 | 65 |

NOTE: The air infiltration and water resistance performance values provided above were achieved in a controlled lab environment. Performance of our products in the field will vary depending on product configurations, installation methods, and ambient conditions. AAMA 502 "Voluntary Specification for Field Testing of Newly Installed Fenestration Products" should be adhered to for testing installed products. | ¹ U-values will vary depending upon glazing selected.

GT0200 SERIES QUICK VIEW:


A horizontal sliding commercial window that mulls to 4" frame fixed and operable products. Chrome steel ball bearing rollers adjust to two positions. All sash, fixed and operating, are removable from inside. White bronze hardware. Thermal strut for enhanced thermal performance.

STANDARD FEATURES

- Dual strut thermal breaks for improved thermal performance
- Mulls to 4" frame fixed and operable products
- All sash, fixed and operating, are removable from inside
- Chrome steel ball bearing rollers adjust to two positions
- Full-length integral pull rails
- Sweep lock and keeper
- Exterior-beveled (putty) glazing leg on Model GT0200H (Historic beveled sash) & up to 1" insulating glass

OPTIONAL FEATURES

- Anti-takeout blocks to restrict sash removal
- Extruded latch at jamb
- Flanged frame 2"
- Bypassing sash (not available with extruded locks) for easy cleaning without removing
- Dual finish (two-tone color) option
- Up to 1 1/4" glazing pocket on Model GT0200F (flat glazing leg sash) for triple glazing combinations
- Optional 15 lbs. water sill and high performance meeting rails

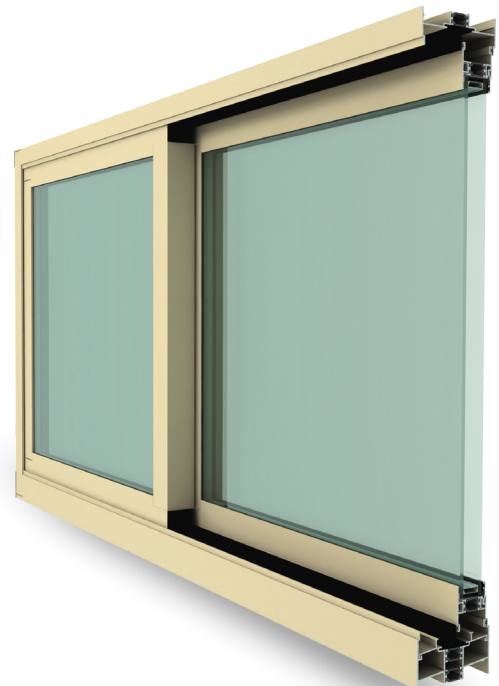

Window series: GT0200 Horizontal Sliding — General Specifications & Details

- Nominal Frame/Sill Wall Thickness: 0.062/0.078"
- Applications: Industrial, Educational, Hospitals, and Historic
- Max. Test size: 8'3" x 6'7"
- Mulling: Mulls to operable and fixed units with 4" frame depth
- Glazing: Single lite to 1/4"; Insulating to 1 1/4"; bead glazed
- Muntins: Grids between lites of IG or exterior applied

- Finish Options:
 - AAMA 2603 — Standard acrylic or polyester
 - AAMA 2604 — 2 coat 50% fluoropolymer
 - AAMA 2605 — 2 coat fluoropolymer 70% kynar
 - Powder Coat
 - Anodized
- Hardware:
 - 2 position stainless steel roller ball bearings
 - White bronze hardware
- Accessories:
 - Frame Family: 4"
 - Fixed Lite Option System: GT1400
 - Mullions:
 - Stacking: Integral & fixed-stack mull
 - Side: 3-piece-mull
 - Panning: Available
 - Trims: Available
 - Receptor Systems: Available
- Exceptions: Call Graham sales rep or see website for more information

Our products are tested to the standards of and certified by the American Architectural Manufacturers Association and the National Fenestration Rating Council.



Check website for most current information including detail drawings and hardware options:
www.grahamwindows.com - 1551 Mt. Rose Avenue, York, Pennsylvania 17403-2909 - (800) 755-6274 (717) 849-8100

Updated
2-19