

US8375 SERIES UNITIZED CURTAIN WALL DATA SHEET



US8375 SERIES QUICK VIEW:

The US8375 Series unitized curtain wall system was designed as a versatile, high performing solution for buildings that require superior performance and rapid installation.


FEATURES

- Outside glazed
- 3" face width
- 8-³/₈" standard depth
- Captured or structurally glazed
- Integrated lifting/alignment brackets
- 1/4"-1-1/8" glazing infills
- 3/8" thermal separation
- Screw-spline construction


OPTIONAL FEATURES

- Zero sightline vents
- Sunshades and light shelves

US8375 C Details (Horizontal Section)

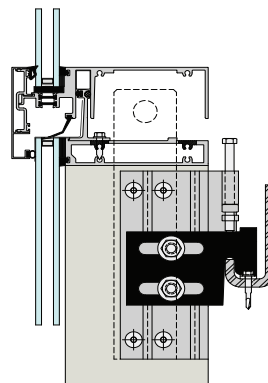

US8375 S Details (Horizontal Section)

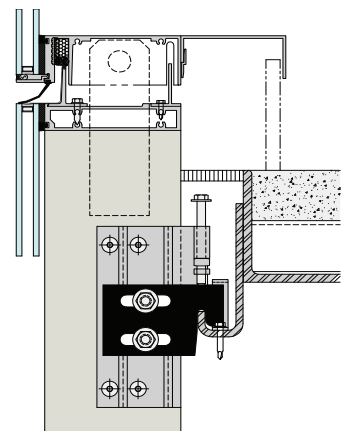

AIR (cfm/ft²) @ 6.24 psf	WATER (psf)	U-FACTOR (BTU/hr/ft²/°F)
0.03	15	0.33 ¹

¹U-factor will Vary depending on glazing selected.

Check website for most current information including detail drawings and hardware options: www.grahamwindows.com
1551 Mt. Rose Avenue, York, Pennsylvania 17403-2909 (800) 755-6274 (717) 849-8100