




DESIGNED TO PROTECT • TESTED TO PERFORM • MANUFACTURED IN THE USA



BEFORE:




AFTER:



LEVEL 3 RATED

STANDARD BR6800 FEATURES

- Aluminum framing with configurable protective glazing options
- Ballistic and blast-resistant combined product available
- Ballistically tested by independent laboratory
- Tested to UL752 Level III Ballistic Standard
- Improves asset protection and life-safety issues
- Helps deter robbery attempts
- Ballistics, blast, and architectural windows are available with the same sight-lines (architect can get the protection desired without sacrificing aesthetic appeal)

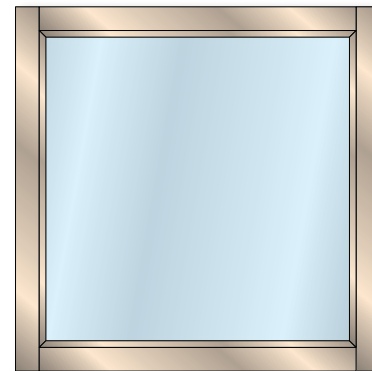

Ballistic-Resistant
Fixed Window


UL 752 Bullet-Resistant Ratings

Rating	Ammunition	Weight	(g)	Velocity min max fps	mps	No. of Shots
LEVEL 1	9mm Full-Metal Copper Jacket with Lead Core	124 grains	8	1175 1293	358	3
LEVEL 2	.357 Magnum Jacketed Lead Soft Point	158 grains	10.2	1250 1375	385	3
LEVEL 3	.44 Magnum Lead Semi-Wadcutter Gas Checked	240 grains	15.6	1350 1485	411	3
LEVEL 4	.30 Caliber Rifle Lead Core Soft Point (.30-06 Caliber)	180 grains	11.7	2540 2794	774	1
LEVEL 5	7.62mm Rifle Lead Core Full-Metal Copper Jacket, Military Ball (.308 Caliber)	150 grains	9.7	2750 3025	838	1
LEVEL 6	9mm Full-Metal Copper Jacket with Lead Core	124 grains	8	1400 1540	427	5
LEVEL 7	5.56mm Rifle Full-Metal Copper Jacket with Lead Core (.223 Caliber)	55 grains	3.56	3080 3380	939	5
LEVEL 8	7.62mm Rifle Lead Core Full-Metal Copper Jacket, Military Ball (.308 Caliber)	150 grains	9.7	2750 3025	838	5
Supplementary Shotgun	12-Gauge Rifled Lead Slug and 12-Gauge 00 Lead Buckshot (12 pellets)	1 oz.	28.3	1585	483	3
				1744		
		1.5 oz.	42	1200	366	3
				1320		

Series BR6800 3½" Frame Depth
BALLISTIC-RESISTANT
FIXED



Details Are Not Shown to Scale
Please reference drawing BR6801 on
our website.

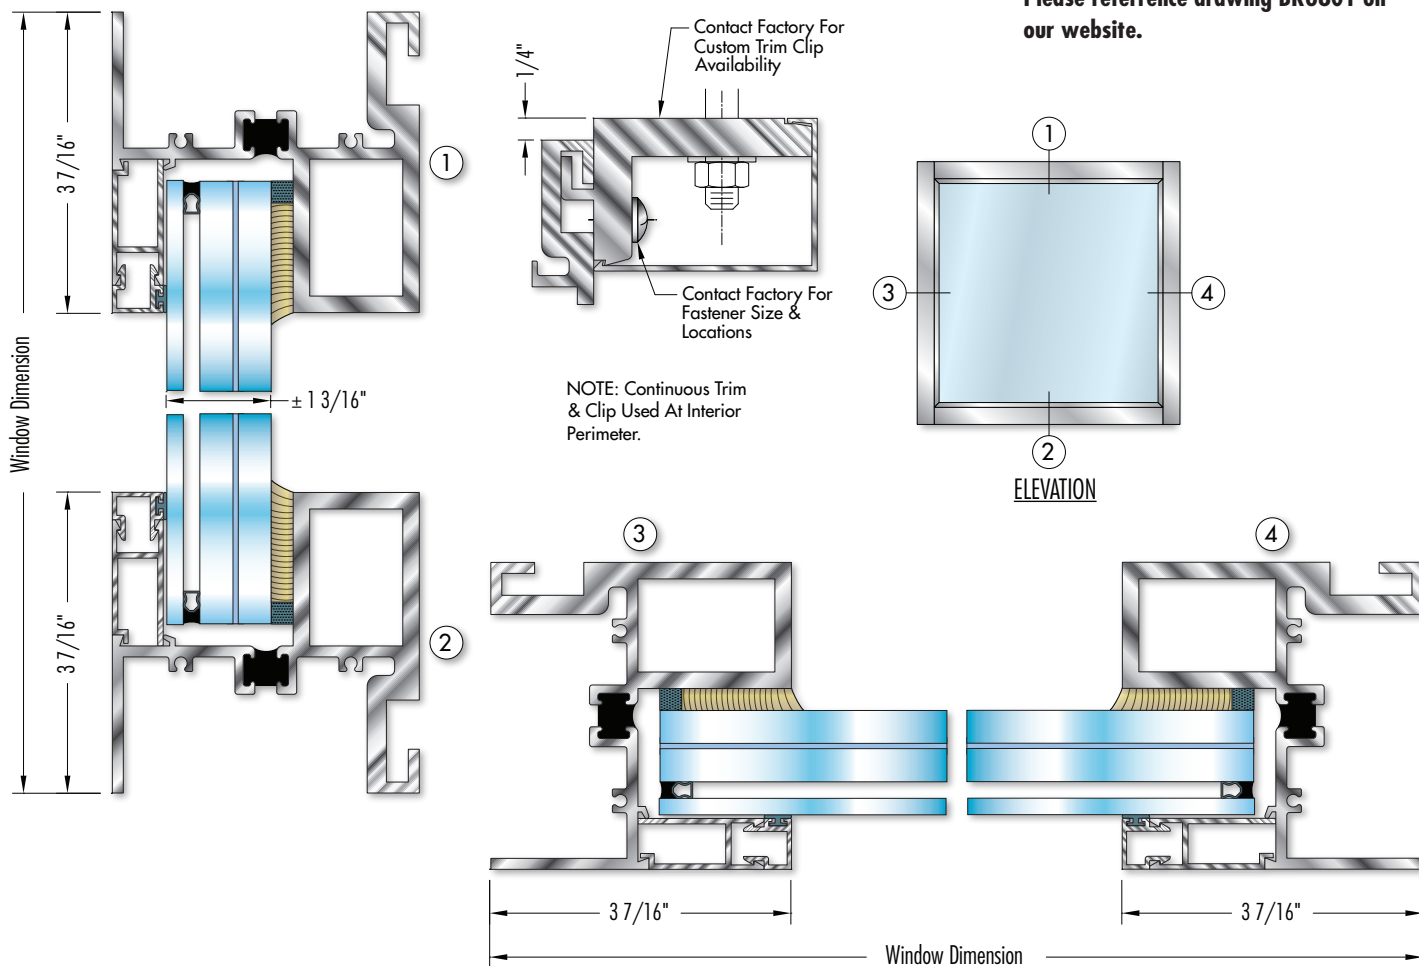

Series BR6800 ACCESSORIES




Panning



Muntin/Grid



Interior Trim & Clip



Mullions

Window Series:
BR6800 FIXED

General Specifications & Details

- Nominal Frame Wall Thickness: Varies
- Glazing:
 - Variety of glazing options available
- Muntins: Applied grids available
- Finish Options:
 - AAMA 2603
 - AAMA 2604
 - AAMA 2605
 - Powder Coat
 - Anodized

- Accessories:
 - Frame Family: 3½"
 - Mullions: "T" mullion or tube mullion
 - Trims: Trim & clip anchoring
- Exceptions: Call Graham sales rep or see website for more information.

See website for other available configurations