

## 911 SERIES DATA SHEET

TYPE	AAMA RATING & TEST SIZE	AIR (cfm/ft <sup>2</sup> ) at 50 mph	WATER (psf)	DESIGN PRESSURE (psf)	STRUCTURAL OVERLOAD (psf)	U-VALUE (BTU/hr/ft <sup>2</sup> /°F) <sup>1</sup>	NFRC CR
HUNG/CASEMENT*	N/A	0.23	6	N/A	60.2	0.38 – 0.42 <sup>1</sup>	N/A
CASEMENT (only)	AW-PG60 48 x 71 – C	< 0.01	12	60	90.0		47

NOTE: The air infiltration and water resistance performance values provided above were achieved in a controlled lab environment. Performance of our products in the field will vary depending on product configurations, installation methods, and ambient conditions. AAMA 502 "Voluntary Specification for Field Testing of Newly Installed Fenestration Products" should be adhered to for testing installed products. | <sup>1</sup> U-values will vary depending upon glazing selected. | \* Estimated values based on similar product.

### 911 SERIES QUICK VIEW:


An egress system designed to operate as a single hung window under normal conditions and as a casement in emergency situations. Also available as a casement vent only product.

### STANDARD FEATURES

- 2<sup>3</sup>/<sub>4</sub>" or 3<sup>3</sup>/<sub>8</sub>" frame depth for casement only configuration; 3<sup>3</sup>/<sub>8</sub>" for single hung/casement configuration
- Block & tackle balances
- Thermal strut technology for superior U-values
- Automatic locking at the sill
- Euro-groove design for hardware versatility
- Dry glazed with EPDM & marine vinyl
- 7/8" overall glazing

### OPTIONAL FEATURES

- True and exterior-applied muntin grids (casement only configuration)
- Exterior-applied muntin grids (single hung/casement configuration)
- May be fitted with insect or security screen while still meeting egress codes

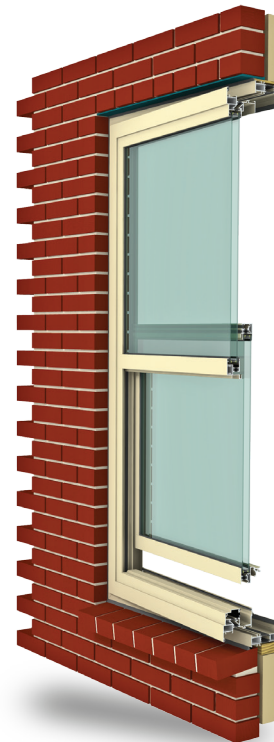

## Window series: 911 Single Hung/Casement — General Specifications & Details

- Applications: Industrial, Apartments, Hotels, and Condos
- Max. Test size: 4' x 6'
- Glazing Options:  
   Insulating 7/8" IG
- Muntins: Between-the-glass-grids

- Finish Options:  
   AAMA 2603 — Standard acrylic or polyester
- Hardware:  
   Single Hung: Extruded auto-lock at sill  
   Casement: Single-point lock
- Accessories:  
   Frame Family: 3-3/8" (Hung), 2<sup>3</sup>/<sub>4</sub>" (Casement Only)  
   Mullions:  
     Stacking: Stack mull  
     Side: 3-piece-mull  
   Panning: Available  
   Trims: Available  
   Receptor Systems: Available
- Exceptions: Call Graham sales rep or see website for more information

Our products are tested to the standards of and certified by the American Architectural Manufacturer's Association and the National Fenestration Rating Council.

