



# B0300/B0360 SERIES DATA SHEET

| WINDOW TYPE           |                   | FRAME DEPTH (inches) | SERIES | DESIGNED BLAST PRESSURE (psi) | POSITIVE PHASE IMPULSE (psi-msec) | WINDOW SIZE (inches)           | GLAZING COMPOSITION (inches)   | TESTING & CERTIFICATIONS       |  |                         |
|-----------------------|-------------------|----------------------|--------|-------------------------------|-----------------------------------|--------------------------------|--------------------------------|--------------------------------|--|-------------------------|
|                       |                   |                      |        |                               |                                   |                                |                                | Test Methods                   | Qualified  | Certification           |
| Aluminum Horizontal   | Slider            | 3 1/4                | B0300  | 6.3                           | 46                                | 66 x 48                        | 1/4 annealed, 1/2 as, 1/4 lami | ASTM F 1642<br>GSA-TS01        | ASTM "Minimal Hazard"<br>GSA Condition 2<br>UFC 4-010-01 | Independent Test Report |
|                       | Slider            | 3 1/4                | B0360  | Blast Evaluated               | Various                           | 1/4 annealed, 1/2 as, 1/4 lami | UFC & GSA Calculated           | Independent Calculation Report |  |                         |
|                       | Fixed Over Slider |                      |        |                               |                                   |                                |                                |                                |  |                         |
| Projected Over Slider |                   |                      |        |                               |                                   |                                |                                |                                |  |                         |

Products comply with Unified Facilities Criteria UFC 4-010-01; DoD Minimum Antiterrorism Standards for Buildings

## STANDARD FEATURES

- Horizontal Sliding windows for blast mitigation
- Provides GSA level C protection against explosive attacks
- Meets DoD UFC 4-010-01 criteria
- Utilizes standard locking hardware
- Trim & clip or receptor anchoring system
- 1" insulating glass construction using industry standard laminated technology
- Mulls to 3 1/4" frame fixed and operable products
- Sash easily removes from interior for maintenance & cleaning
- Full-length extruded pull rails
- Adjustable (two positions) steel sash rollers
- B03600 model incorporates integral attachment clip

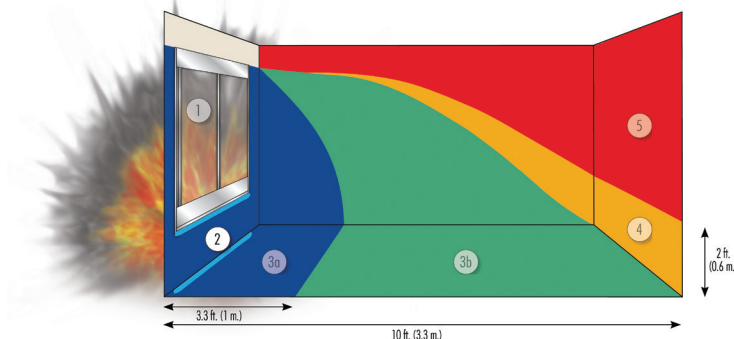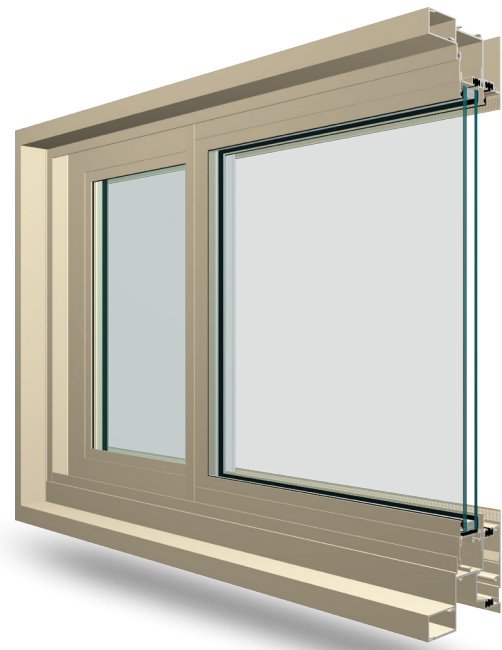

Series B0300 Meets GSA Condition 2

## Window series: B0300/B0360 Horizontal Sliding — General Specifications & Details

- Nominal Frame/Sill Wall Thickness: 0.062/0.078"
- Test Size:  
66" x 48"
- Mulling: Mulls to operable and fixed units with 3 1/4" frame depth
- Glazing:  
3/16" annealed, 1/2" spacer, 3/16" laminated
- Muntins: Exterior applied or between IG grids available

- Finish Options:  
AAMA 2603 — Standard acrylic or polyester  
AAMA 2604 — 2 coat 50% fluoropolymer  
AAMA 2605 — 2 coat fluoropolymer 70% kynar  
Powder Coat  
Anodized
- Hardware:  
2 position steel sash rollers  
White bronze sweep lock and keeper
- Accessories:  
Frame Family: 3 1/4"  
Fixed Lite Option System: 1200  
Mullions: Stacking: Integral & fixed-stack mull  
Side: 3-piece mull  
Panning: Available  
Trims: Available  
Receptor Systems: Available
- Exceptions: Call Graham sales rep or see website for more information

Our products are tested to the standards of and certified by the American Architectural Manufacturer's Association and the National Fenestration Rating Council.

