

## GT6200 SERIES DATA SHEET

TYPE	AAMA RATING & TEST SIZE	AIR (cfm/ft <sup>2</sup> ) at 50 mph	WATER (psf)	DESIGN PRESSURE (psf)	STRUCTURAL OVERLOAD (psf)	U-VALUE (BTU/hr/ft <sup>2</sup> /°F) <sup>1</sup>
FIXED	AW PG55 60 x 99	0.01	12.11	55.14	82.71	0.27 – 0.35

NOTE: The air infiltration and water resistance performance values provided above were achieved in a controlled lab environment. Performance of our products in the field will vary depending on product configurations, installation methods, and ambient conditions. AAMA 502 "Voluntary Specification for Field Testing of Newly Installed Fenestration Products" should be adhered to for testing installed products. | <sup>1</sup> U-values will vary depending upon glazing selected

### GT6200 SERIES QUICK VIEW:


Highly energy efficient fixed window system that can mull to other GT products of the same frame depth.

### STANDARD FEATURES

- Thermal strut technology for superior U-values
- Dual finish capability
- EPDM dry glazed to accommodate field glazing

### OPTIONAL FEATURES

- Between-the-glass grids; exterior applied grids
- Radius shapes and custom curving to specification
- Dual finish (two-tone color) option

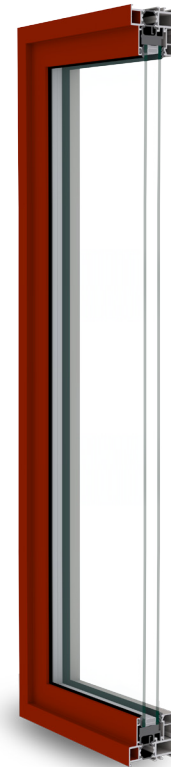

## Window series: GT6200 Fixed — General Specifications & Details

- Nominal Frame/Sill Wall Thickness: 0.062"
- Applications: Industrial, Educational, Hospitals, Acoustical, and Historic
- Max Test Size: 5'0" x 8'3"
- Glazing Options:
  - Single Glazed: Available
  - Insulating: 1" and 1<sup>5</sup>/<sub>8</sub>" IG available
- Muntins: Exterior-applied profile muntin grids available

- Finish Options:
  - AAMA 2603 — Standard acrylic or polyester
  - AAMA 2604 — 2 coat 50% fluoropolymer
  - AAMA 2605 — 2 coat fluoropolymer 70% kynar
  - Powder Coat
  - Anodized
- Accessories:
  - Frame Family: 2<sup>3</sup>/<sub>4</sub>" or 3-3/8"
  - Operable Mating Window System: GT6200 Casement and Projected
  - Mullions:
    - Stacking: Stack mull
    - Side: 3-piece-mull
  - Panning: Available
  - Trims: Available
  - Receptor Systems: Available
- Exceptions: Call Graham sales rep or see website for more information

Our products are tested to the standards of and certified by the American Architectural Manufacturer's Association and the National Fenestration Rating Council.

