

## GT7800 SERIES DATA SHEET

TYPE	AAMA RATING & TEST SIZE	AIR (cfm/ft <sup>2</sup> ) at 50 mph	WATER (psf)	DESIGN PRESSURE (psf)	STRUCTURAL OVERLOAD (psf)	U-VALUE (BTU/hr/ft <sup>2</sup> /°F) <sup>1</sup>	CRF	STC	OITC
DUAL ACTION	DAW-HC95 36 x 72	0.05	12.12	95.30	142.95	0.29 – 0.38	47	30 - 36	33 - 36
	HC-40 60 x 99	0.01	8.36	60.19	90.28	0.29 – 0.38	47	30 - 36	33 - 36

NOTE: The air infiltration and water resistance performance values provided above were achieved in a controlled lab environment. Performance of our products in the field will vary depending on product configurations, installation methods, and ambient conditions. AAMA 502 "Voluntary Specification for Field Testing of Newly Installed Fenestration Products" should be adhered to for testing installed products. | <sup>1</sup> U-values will vary depending upon glazing selected.

### GT7800 SERIES QUICK VIEW:


Highly energy efficient dual action window system that can mull to other GT products of the same frame depth.

### STANDARD FEATURES

- 2<sup>3</sup>/<sub>4</sub> or 3<sup>3</sup>/<sub>8</sub> frame depth
- 1" overall glazing
- Multi-point locking at all four sides of the window
- Thermal strut technology for superior U-values
- Center gasketed for pressure equalization
- Euro-groove design for hardware versatility
- EPDM dry glazed

### OPTIONAL FEATURES

- Exterior-applied muntin grids
- Limit device (Casement Mode)
- Dual finish (two-tone color) option

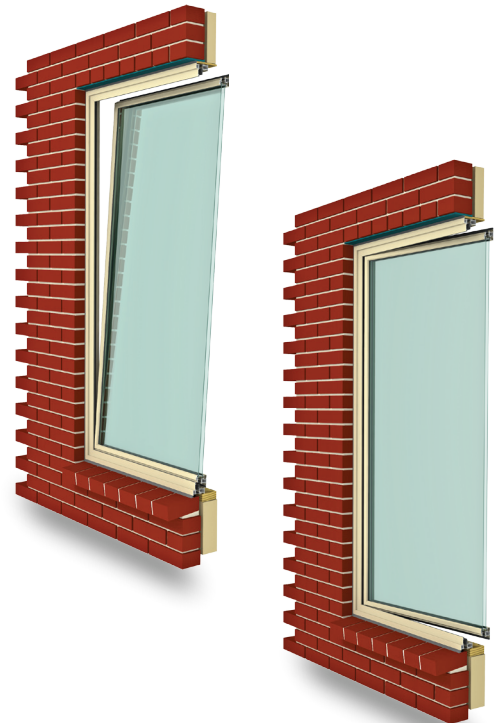

## Window series: GT7800 Dual Action — General Specifications & Details

- Applications: Industrial, Educational and Hospitals
- Max. Test size: Fixed 5'0" x 8'3"
- Glazing Options:  
 Insulating: 1" IG available with options
- Muntins: Between-the-glass or exterior applied

- Finish Options:  
 AAMA 2603 — Standard acrylic or polyester  
 AAMA 2604 — 2 coat 50% fluoropolymer  
 AAMA 2605 — 2 coat fluoropolymer 70% kynar  
 Powder Coat  
 Anodized
- Hardware:  
 Multi-point/dual locking hardware
- Accessories:  
 Frame Family: 2<sup>1</sup>/<sub>4</sub>" or 3-3/8"  
 Fixed Lite Option System: GT6200  
 Mullions:  
   Stacking: Stack mull  
   Side: 3-piece-mull  
 Panning: Available  
 Trims: Available  
 Receptor Systems: Available
- Exceptions: Call Graham sales rep or see website for more information.

Our products are tested to the standards of and certified by the American Architectural Manufacturer's Association and the National Fenestration Rating Council.

